

Four technological innovations

- Counteract dithering technique
- Intelligent detecting technique
- Humanized clutch unit
- Just one second for pole lifting

The intelligent clutch, adopting the nerve induction. When power on, the pole of the bar can't be lifted by man. But when power cut, you can lift the pole freely.

It can choose the falling direction of the pole, solve the trivialness of traditional orientation, fall left and fall right. Regardless you choose left orientation or right orientation tradition, it can transform freely

Special craft creation.

An gliding appearance.

Display the sublimate temperament to the utmost, bring the fire-new feeling for you.

Fortified design can provide the nonstandard pole length for you to satisfy your different demands.



AB-280



AB-372



AB-284

Palisade Barrier	AB-280	AB-372	AB-372
Machine Core Temperature	-40°C~+75°C	-40°C~+75°C	-40°C~+75°C
Electric Working Temperature	-10°C~+75°C	-10°C~+75°C	-10°C~+75°C
Power Supply	220V±10% 50Hz/60Hz 110V±10% 50Hz/60Hz	220V±10% 50Hz/60Hz 110V±10% 50Hz/60Hz	220V±10% 50Hz/60Hz 110V±10% 50Hz/60Hz
Rating Power	80W	80W	80W
Relative Humidity	≤90%	≤90%	≤90%
Pole Length (m)	L≤6	L≤6	L≤6
Lift (fall) Time	6s	6s	6s

* This value changes according



Four technological innovations

- Counteract dithering technique
- Intelligent detecting technique
- Humanized clutch unit
- Just one second for pole lifting

The intelligent clutch, adopting the nerve induction. When power on, the pole of the bar can't be lifted by man. But when power cut, you can lift the pole freely.

It can choose the falling direction of the pole, solve the trivialness of traditional orientation, fall left and fall right. Regardless you choose left orientation or right orientation tradition, it can transform freely

Special craft creation.

An gliding appearance.

Display the sublimate temperament to the utmost, bring the fire-new feeling for you.

Fortified design can provide the nonstandard pole length for you to satisfy your different demands.



Controlling line



AB-284A



AB-284B

Palisade Barrier	AB-284A	AB-284B
Machine Core Temperature	-40°C~+75°C	-40°C~+75°C
Electric Working Temperature	-10°C~+75°C	-10°C~+75°C
Power Supply	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz
Rating Power	80W	80W
Relative Humidity	≤90%	≤90%
Pole Length (m)	L ≤ 4.5	L ≤ 4.5
Lift (fall) Time	3s	3s

* This value changes according

DSW Electronics Ltd. reserves the right to make changes without notification.



Four technological innovations

- Counteract dithering technique
- Intelligent detecting technique
- Humanized clutch unit
- Just one second for pole lifting

The intelligent clutch, adopting the nerve induction. When power on, the pole of the bar can't be lifted by man. But when power cut, you can lift the pole freely.


It can choose the falling direction of the pole, solve the trivialness of traditional orientation, fall left and fall right. Regardless you choose left orientation or right orientation tradition, it can transform freely

Special craft creation.


An gliding appearance.

Display the sublimate temperament to the utmost, bring the fire-new feeling for you.

Fortified design can provide the nonstandard pole length for you to satisfy your different demands.

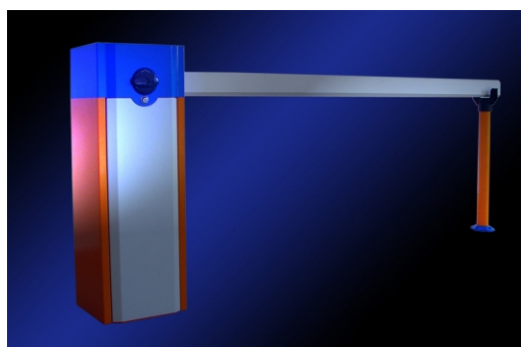

AB-301

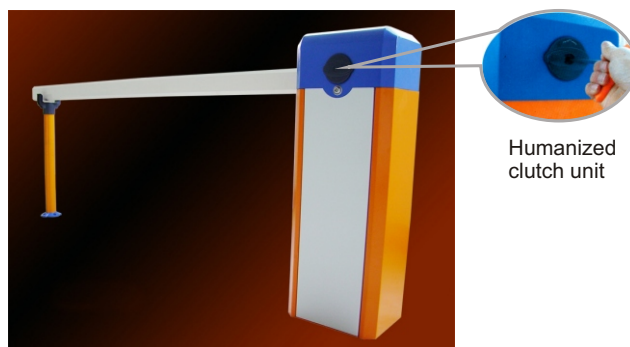

AB-PG

Humanized clutch unit

Palisade Barrier	AB-301	AB-PG
Machine Core Temperature	-40°C~+75°C	-40°C~+75°C
Electric Working Temperature	-10°C~+75°C	-10°C~+75°C
Power Supply	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz
Rating Power	80W	80W
Relative Humidity	≤90%	≤90%
Pole Length (m)	L ≤ 4.5	L ≤ 4.5
Lift (fall) Time	3s	3s

* This value changes according



Four technological innovations

- Counteract dithering technique
- Intelligent detecting technique
- Humanized clutch unit
- Just one second for pole lifting

The intelligent clutch, adopting the nerve induction. When power on, the pole of the bar can't be lifted by man. But when power cut, you can lift the pole freely.

It can choose the falling direction of the pole, solve the trivialness of traditional orientation, fall left and fall right. Regardless you choose left orientation or right orientation tradition, it can transform freely

Special craft creation.

An gliding appearance.

Display the sublimate temperament to the utmost, bring the fire-new feeling for you.

Fortified design can provide the nonstandard pole length for you to satisfy your different demands.



AB-355E



AB-355D

Palisade Barrier	AB-355E	AB-355D
Machine Core Temperature	-40°C~+75°C	-40°C~+75°C
Electric Working Temperature	-10°C~+75°C	-10°C~+75°C
Power Supply	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz
Rating Power	80W	80W
Relative Humidity	≤90%	≤90%
Pole Length (m)	L ≤ 3	L ≤ 3
Lift (fall) Time	1.2s	1.2s

* This value changes according



Four technological innovations

- **Counteract dithering technique**
- **Intelligent detecting technique**
- **Humanized clutch unit**
- **Just one second for pole lifting**

The intelligent clutch, adopting the nerve induction. When power on, the pole of the bar can't be lifted by man. But when power cut, you can lift the pole freely.

It can choose the falling direction of the pole, solve the trivialness of traditional orientation, fall left and fall right. Regardless you choose left orientation or right orientation tradition, it can transform freely

Special craft creation.

An gliding appearance.

Display the sublimate temperament to the utmost, bring the fire-new feeling for you.

Fortified design can provide the nonstandard pole length for you to satisfy your different demands.



AB-FB180°



AB-FB90°

Palisade Barrier	AB-FB180°	AB-FB90°
Machine Core Temperature	-40°C~+75°C	-40°C~+75°C
Electric Working Temperature	-10°C~+75°C	-10°C~+75°C
Power Supply	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz
Rating Power	80W	80W
Relative Humidity	≤90%	≤90%
Pole Length (m)	L ≤ 5	L ≤ 5
Lift (fall) Time	6s	6s

* This value changes according



Four technological innovations

- Counteract dithering technique
- Intelligent detecting technique
- Humanized clutch unit
- Just one second for pole lifting

The intelligent clutch, adopting the nerve induction. When power on, the pole of the bar can't be lifted by man. But when power cut, you can lift the pole freely.


It can choose the falling direction of the pole, solve the trivialness of traditional orientation, fall left and fall right. Regardless you choose left orientation or right orientation tradition, it can transform freely

Special craft creation.


An gliding appearance.

Display the sublimate temperament to the utmost, bring the fire-new feeling for you.

Fortified design can provide the nonstandard pole length for you to satisfy your different demands.

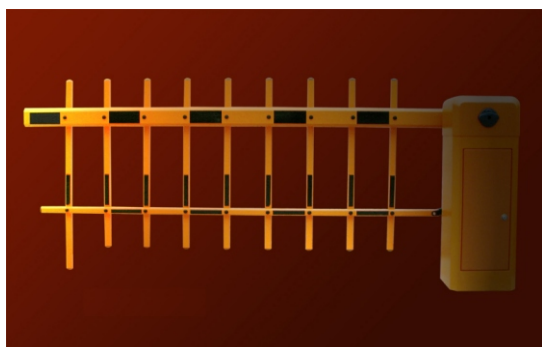

AB-PBE1

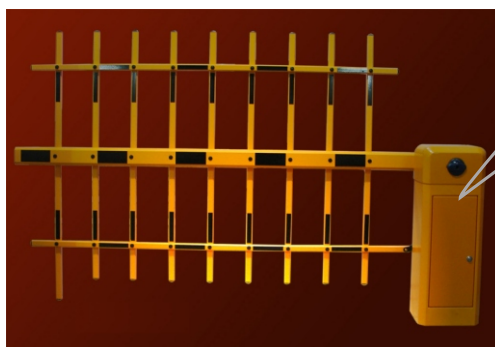

AB-PBE2



The machine core of the barriers

Palisade Barrier	AB-PBE1	AB-PBE2
Machine Core Temperature	-40°C~+75°C	-40°C~+75°C
Electric Working Temperature	-10°C~+75°C	-10°C~+75°C
Power Supply	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz	220V ± 10% 50Hz/60Hz 110V ± 10% 50Hz/60Hz
Rating Power	80W	80W
Relative Humidity	≤90%	≤90%
Pole Length (m)	L ≤ 4.5	L ≤ 4
Lift (fall) Time	6s	6s
Center Hight (m)	H=0.9	H=1.5

* This value changes according

