

# Video DoorPhone

DSW Video DoorPhone

## VIDEO DOORPHONE

**Model No.: EVP438-2WCO**



<b>Type:</b>	Color Video Doorphone
<b>Tube:</b>	4 inch flat tube CCIR or EIR
<b>TV system:</b>	15.75Khz (H) 60Hz(V)
<b>Resolution:</b>	420 Line
<b>Call Signal Sound:</b>	Chime Sound (Ding-Dong, Bell)
<b>Telephone System:</b>	2 Wires
<b>Auto Iris:</b>	Internal ALC System
<b>Power Supply:</b>	AC230V/50HZ or 120V/60HZ
<b>Wiring Distance:</b>	50 M
<b>CCD:</b>	1/3 CCIR or CMOS
<b>Lens:</b>	f13.8MM F1.8 92
<b>Output Signal:</b>	Composite Video 75 Ohm 1Vpp
<b>Min illumi:</b>	0.1 Lux
<b>Power Source:</b>	AC 110-220V DC12V/300mA(adapter)
<b>Remark:</b>	210(W)*210(H)*47(D)mm

**Model No.: EVP438-COL**



<b>Type:</b>	Video Doorphone
<b>Tube:</b>	4 inch flat tube ( COLOR ) CCIR or EIR
<b>TV system:</b>	15.75Khz (H) 60Hz(V)
<b>Resolution:</b>	420 Line
<b>Call Signal Sound:</b>	Chime Sound (Ding-Dong, Bell)
<b>Telephone System:</b>	4 Wire
<b>Auto Iris:</b>	Internal ALC System
<b>Power Supply:</b>	AC230V/50HZ or 120V/60HZ
<b>Wiring Distance:</b>	50 M
<b>CCD:</b>	1/3 CCIR or CMOS
<b>Lens:</b>	f13.8MM F1.8 92
<b>Output Signal:</b>	Composite Video 75 Ohm 1Vpp
<b>Min illumi:</b>	0.1 Lux
<b>Power Source:</b>	AC 110~220V DC12V/300mA(adapter)
<b>Remark:</b>	210(W)*210(H)*47(D)mm

**Model No.: EVP438-BW**



<b>Type:</b>	Video Doorphone
<b>Tube:</b>	4 inch flat tube (B/W) CCIR or EIR
<b>TV system:</b>	15.75Khz (H) 60Hz(V)
<b>Resolution:</b>	420 Line
<b>Call Signal Sound:</b>	Chime Sound (Ding-Dong, Bell)
<b>Telephone System:</b>	4 Wire
<b>Auto Iris:</b>	Internal ALC System
<b>Power Supply:</b>	AC230V/50HZ or 120V/60HZ
<b>Wiring Distance:</b>	50 M
<b>CCD:</b>	1/3 CCIR or CMOS
<b>Lens:</b>	f13.8MM F1.8 92
<b>Output Signal:</b>	Composite Video 75 Ohm 1Vpp
<b>Min illumi:</b>	0.1 Lux
<b>Power Source:</b>	AC 110-220V DC12V/300mA(adapter)
<b>Remark:</b>	210(W)*210(H)*47(D)mm

**Model No.: EVP438A-COL**



<b>Type:</b>	Outdoor bell Specification
<b>Power source:</b>	DC 12V supplied by indoor phone
<b>Camera:</b>	CCD (CMOS optional)
<b>Illumination:</b>	0.5 LUX
<b>Light source:</b>	6 infrared LEDs
<b>Power consumption:</b>	Max. 6.8W, standby 3W
<b>Operating temperature:</b>	-25°C~75°C
<b>Installation:</b>	Wall-mount/flush
<b>Power source:</b>	DC 14V
<b>Power consumption:</b>	Max. 14.7W, standby 1.3W.
<b>Resolution:</b>	450 TV Line
<b>Chime:</b>	Chime "Ding dong"
<b>Displayer:</b>	4" color TFT LCD
<b>Operating temperature:</b>	-15°C~55°C
<b>Installation:</b>	Wall-mount
<b>PACKAGE:</b>	1 set per gift color box, 6 sets per carton.
<b>G.W.:</b>	17.5kg/CTN
<b>N.W.:</b>	16.8kg/CTN
<b>MEASUREMENT:</b>	60*45*33cm/CTN
<b>MIN. ORDER QNTY:</b>	100 sets per lot

DSW Security

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness

# Video DoorPhone

DSW Video DoorPhone

## VIDEO DOORPHONE

**Model No.: EVP438A-BW**



<b>Type:</b>	Outdoor bell Specification
<b>Power Source:</b>	DC 14V
<b>Power Consumption:</b>	12W
<b>Display:</b>	4" Flat CRT Tube
<b>Chime:</b>	Ding Dong Chime
<b>Communication:</b>	dual- way
<b>Resolution:</b>	380 lines
<b>Operating temperature:</b>	-25°C~75°C
<b>Installation:</b>	wall- mounted
<b>Outdoor station:</b>	plastic material
<b>Power Source:</b>	AC100~240V
<b>Camera:</b>	CMOS
<b>Illumination:</b>	0.1LUX
<b>light source:</b>	6 infrared LED
<b>Operating temperature:</b>	-25°C~75°C
<b>Installation:</b>	Wall-mounted

**Model No.: EVP-238-2WCO**



<b>Type:</b>	Color Video Doorphone
<b>Tube:</b>	4 inch flat tube CCIR or EIR
<b>TV system:</b>	15.75Khz (H) 60Hz(V)
<b>Resolution:</b>	420 Line
<b>Call Signal Sound:</b>	Chime Sound (Ding-Dong, Bell)
<b>Telephone System:</b>	2 Wires
<b>Auto Iris:</b>	Internal ALC System
<b>Power Supply:</b>	AC230V/50HZ or 120V/60HZ
<b>Wiring Distance:</b>	50 M
<b>CCD:</b>	1/3 CCIR or CMOS
<b>Lens:</b>	f13.8MM F1.8 92
<b>Output Signal:</b>	Composite Video 75 Ohm 1Vpp
<b>Min illumi:</b>	0.1 Lux
<b>Power Source:</b>	AC 110-220V DC12V/300mA(adapter)
<b>Remark:</b>	210(W)*210(H)*47(D)mm

**Model No.: EVP-228MCF**



<b>Type:</b>	Four wires color video and audio doorphone
<b>Power course:</b>	AC 110~240V
<b>Wait Consume:</b>	< 0.5W
<b>Oeration Consume:</b>	≤10W
<b>Oeration temperature:</b>	-15°C~+50°C
<b>Screen:</b>	3.5" TFT LCD
<b>Effective resolution:</b>	480(H)*234(V)
<b>Monitor:</b>	225(L)*190(W)*62(H)mm
<b>Camera:</b>	160(L)*70(W)*26(H)mm
<b>Phone:</b>	210(L)*79(W)*45(H)mm
<b>Installation:</b>	surface-mount
<b>Match way:</b>	One to one, one to two
<b>Connection:</b>	4 wires

**Model No.: EVP-278S-COL**



<b>Type:</b>	Four wires Handfree color video doorphone
<b>Power course:</b>	DC 16V
<b>Wait Consume:</b>	<0.5W
<b>Oeration Consume:</b>	<10W
<b>Oeration temperature:</b>	-15°C~+50°C
<b>Screen:</b>	3.5"/5" TFT LCD
<b>Effective resolution:</b>	480(H)*234(V) or 960(H))*234(V)
<b>Monitor:</b>	185(L)*130(W)*27(H)mm
<b>Camera:</b>	127(L)*95(W)*35(H)mm
<b>Installation:</b>	surface-mount
<b>Match way:</b>	One to one, one to two
<b>Connection:</b>	4 wire

DSW Security

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness

# Video DoorPhone

DSW Video DoorPhone


## VIDEO DOORPHONE

Model No.: EVP-298C-2WM



<b>Type:</b>	Two wire hand free color video doorphone
<b>Power course:</b>	DC 16V
<b>Wait Consume:</b>	<0.5W
<b>Oeration Consume:</b>	<10W
<b>Oeration temperature:</b>	-15°C~+50°C
<b>Screen:</b>	3.5"/5" TFT LCD
<b>Effective resolution:</b>	480(H)*234(V) or 960(H)*234(V)
<b>Monitor:</b>	185(L)*130(W)*27(H)mm
<b>Camera:</b>	132(L)*80(W)*22.4(H)mm
<b>Installation:</b>	surface-mount
<b>Match way:</b>	one to one
<b>Connection:</b>	Two wire connection for nonpolarity

Model No.: EVP-129

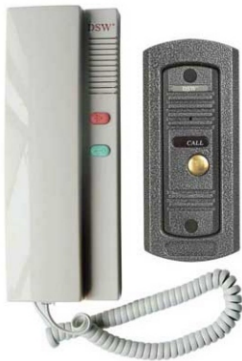

<b>Power course:</b>	AC 110V~240V
<b>Operation temperature:</b>	-15°C~+50°C
<b>Monitor:</b>	210(L)*79(W)*45(H)mm
<b>Camera:</b>	160(L)*70(W)*26(H)mm
<b>Installation:</b>	surface-mount
<b>Match way:</b>	one to one
<b>Connection:</b>	3 wire

Model No.: EVP-228-COL



<b>Type:</b>	Four wires surface-mount color video doorphone
<b>Power course:</b>	DC 16V
<b>Wait Consume:</b>	< 0.5W
<b>Oeration Consume:</b>	≤10W
<b>Oeration temperature:</b>	-15°C~+50°C
<b>Screen:</b>	3.5" TFT LCD
<b>Effective resolution:</b>	480(H)*234(V)
<b>Monitor:</b>	215(L)*212(W)*67(H)mm
<b>Camera:</b>	160(L)*70(W)*26(H)mm
<b>Installation:</b>	surface-mount
<b>Ring way:</b>	Double ring "dingdong"
<b>Match way:</b>	one to one, one to two
<b>Connection:</b>	Four wires

Model No.: EVP-295-COL



<b>Type:</b>	Four Wires hand free color video doorphone
<b>Power course:</b>	DC 16V
<b>Wait Consume :</b>	< 0.5W
<b>Oeration Consume:</b>	≤10W
<b>Oeration temperature:</b>	-15°C~+50°C
<b>Screen:</b>	3.5" TFT LCD
<b>Effective resolution:</b>	480(H)*234(V)
<b>Monitor:</b>	225(L)*170(W)*52(H)mm
<b>Camera:</b>	127(L)*95(W)*35(H)mm
<b>Installation:</b>	surface-mount
<b>Ring way:</b>	Double ring "dingdong"
<b>Match way:</b>	one to one
<b>Connection:</b>	Four wires

DSW Security

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness

# Video DoorPhone

DSW Video DoorPhone

## VIDEO DOORPHONE

Model No.:EVP-278S-COL



<b>Type:</b>	Hand-free color video doorphone
<b>Power supply</b>	DC 16V
<b>Power Consumption</b>	Standby: <0.5W Working: ≤10W
<b>Screen</b>	3.5" or 5" TFT LCD color screen
<b>Resolution</b>	480X234dot or 960X234dot
<b>Viewing Angle</b>	L:50° / R:50° or U:15° / D:35°
<b>Brightness</b>	250cd/m <sup>2</sup> OR 300cd/m <sup>2</sup>
<b>Video Input</b>	1 Vp-p
<b>Cutoff-Time</b>	Stakeot: 1 minute, Conversation: 1 minute
<b>Mike Sensitivity</b>	-60dB
<b>Operation Temperature</b>	-15°C~+50°C
<b>Call Tone</b>	"Ding Dong" chime
<b>External Dimension</b>	185(L)X130(W)X27(H)mm

Model No.:

Model No.:

Model No.:

DSW Security

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness