


Specification:

- * Slim recessed switch
- * 1/4" diameter straight cylindrical set for flush or counter sunk installations
- * Standard 18"#22AWG Leads
- * Switches and magnets available seperately
- * Wide gap up to 1 1/2" with big bare earth mag
- * Colors: White, Brown, Grey
- * MCR-2101 UL & CUL listed
- * Safety approvals:

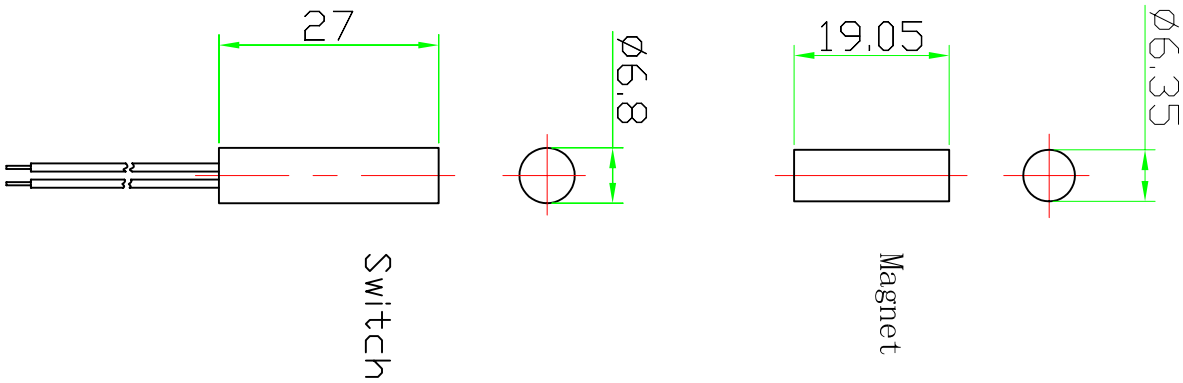

Part Number	Loop Type	Reed Form	Gap [Inch(mm)]	Maximum Initial Contact Resistance (ohm)	Maximum Contact Rating (w)	Maximum Switching Voltage (VDC/VAC)	Maximum Switching Current (A)
MCR-5101	Closed	N/O	1 (.24)	0.150	10	100	0.5
MCR-5101A	Open	N/C	1 (.24)	0.150	3	30	0.2
MCR-5101C	Closed & Open	SPDT	3/4 (.20)	0.150	3	30	0.2

DSW NINGBO DSW AUDIO & SECURITY EQUIPMENT http://www.dswbrand.com	
Magnetic Contacts	
MCR-5101	
No.	DESCRIPTION
DATE	DATE
APPROVED	APPROVALS
CHECKED	CHECKED
APPROVED	APPROVED
04.01.16	04.01.16
SCALE	NOT TO SCALE
UNIT	DWG NO.
mm	E4.840.007
SHEET	VER
	1.0